

## VCCI Test Report (VCCI 32-1)

**Report No.:** V190124D01

**Test Model:** FD9360-HNWL

**Series Model:** FD9360-H

**Received Date:** Jan. 24, 2019

**Test Date:** Jan. 25 to Mar. 29, 2019

**Issued Date:** Apr. 2, 2019

**Applicant:** VIVOTEK INC.

**VCCI member No.:** 2443

**Address:** 6F, No.192, Lien-Cheng Rd., Chung-Ho , New Taipei City, 235, Taiwan, R.O.C.

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. government. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Modification Record.....	5
<b>3 General Information</b> .....	<b>6</b>
3.1 Description of EUT.....	6
3.2 Features of EUT.....	6
3.3 Operating Modes of EUT and Determination of Worst Case Operating Mode.....	7
3.4 Test Program Used and Operation Descriptions.....	7
3.5 Primary Clock Frequencies of Internal Source.....	7
<b>4 Configuration and Connections with EUT</b> .....	<b>8</b>
4.1 Connection Diagram of EUT and Peripheral Devices.....	8
4.2 Configuration of Peripheral Devices and Cable Connections.....	9
<b>5 Conducted Emission from the Mains Power Port</b> .....	<b>10</b>
5.1 Limits.....	10
5.2 Test Instruments.....	10
5.3 Test Arrangement.....	11
5.4 Test Results.....	12
<b>6 Asymmetric Mode Conducted Emission at Telecommunication Ports</b> .....	<b>16</b>
6.1 Limits.....	16
6.2 Test Instruments.....	17
6.3 Test Arrangement.....	19
6.4 Test Results.....	20
<b>7 Radiated Emission at Frequencies up to 1GHz</b> .....	<b>22</b>
7.1 Limits.....	22
7.2 Test Instruments.....	22
7.3 Test Arrangement.....	23
7.4 Test Results.....	24
<b>8 Radiated Emission at Frequencies above 1GHz</b> .....	<b>28</b>
8.1 Limits.....	28
8.2 Test Instruments.....	29
8.3 Test Arrangement.....	30
8.4 Test Results.....	31
<b>9 Pictures of Test Arrangements</b> .....	<b>35</b>
9.1 Conducted Emission from the Mains Power Port.....	35
9.2 Asymmetric Mode Conducted Emission at Telecommunication Ports.....	36
9.3 Radiated Emission at Frequencies up to 1GHz.....	38
9.4 Radiated Emission at Frequencies above 1GHz.....	40
<b>Appendix – Information of the Testing Laboratories</b> .....	<b>42</b>

### Release Control Record

Issue No.	Description	Date Issued
V190124D01	Original release.	Apr. 2, 2019

## 1 Certificate of Conformity

**Product:** Network Camera  
**Brand:** VIVOTEK  
**Test Model:** FD9360-HNWL  
**Series Model:** FD9360-H  
**Sample Status:** Engineering sample  
**Applicant:** VIVOTEK INC.  
**Test Date:** Jan. 25 to Mar. 29, 2019  
**Standards:** VCCI-CISPR 32:2016, Class B

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**           *Jovan Chen*           , **Date:**           Apr. 2, 2019            
Vivian Chen / Specialist

**Approved by :**           *Jim Hsiang*           , **Date:**           Apr. 2, 2019            
Jim Hsiang / Associate Technical Manager

## 2 Summary of Test Results

Emission			
Standard	Test Item	Result/Remarks	Verdict
VCCI-CISPR 32:2016	Conducted emission from the mains power port	Minimum passing Class B margin is -10.72 dB at 0.51664 MHz	Pass
	Asymmetric mode conducted emission at telecommunication ports	Minimum passing Class B margin is -6.88 dB at 18.24347 MHz	Pass
	Radiated emission 30-1000 MHz	Minimum passing Class B margin is -3.77 dB at 42.03 MHz	Pass
	Radiated emission above 1GHz	Minimum passing Class B margin is -10.55 dB at 1250.03 MHz	Pass
	Disturbance Voltage at the Antenna Terminals Test	Without tuner port of the EUT	N/A

Note:

1. There is no deviation to the applied test methods and requirements covered by the scope of this report.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty
3. N/A: Not Applicable

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )	Facility No. Registered to VCCI
Conducted disturbance at mains ports	150kHz ~ 30MHz	2.79 dB	C-11312
Asymmetric mode conducted emission at telecommunication ports using AAN	150kHz ~ 30MHz	3.94 dB	T-11587
Radiated emission, 30MHz ~ 1GHz	30MHz ~ 1GHz	3.97 dB	R-237
Radiated emission, 1GHz ~ 6GHz	Above 1GHz	4.77 dB	G-257

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 Description of EUT

Product	Network Camera
Brand	VIVOTEK
Test Model	FD9360-HNWL
Series Model	FD9360-H
Model Difference	Refer to below note
Sample Status	Engineering sample
Operating Software	N/A
Power Supply Rating	DC 12V or PoE
Accessory Device	N/A
Data Cable Supplied	Shielded Y cable (LAN + DC) with one ferrite core. (0.3m)

Note:

The EUT is a Network Camera, and it has several models, which are identical with each other, except for following difference:

Model	Power supply rating
FD9360-HNWL	DC 12V or PoE
FD9360-H	DC 12V only

During the test, the **Model: FD9360-HNWL** was selected as the representative one and therefore only its test data was recorded in this report.

#### 3.2 Features of EUT

The tests reported herein were performed according to the method specified by VIVOTEK INC., for detailed feature description, please refer to the manufacturer's specifications or user's manual.

### 3.3 Operating Modes of EUT and Determination of Worst Case Operating Mode

1. The EUT was pre-tested under operating and standby condition and the worst emission level was found under **operating condition**.
2. The EUT consumes power from Adapter, which designed with AC power supply of rating 100-240Vac, 50/60Hz. For radiated emission evaluation, 230Vac/50Hz (for EN 55032 & AS/NZS CISPR 32), 100Vac/50Hz & 100Vac/60Hz (for VCCI) had been covered during the pre-test. The worst radiated emission data was found at **230Vac/50Hz**.
3. EUT has been pre-tested under following test modes, and test **mode 2** was the worst case.

Mode	Test Condition
1	Adapter Mode
2	PoE Mode

4. According client's requirement, the final test modes were as the following:

Mode	Test Condition	Input Power
<b>Conducted emission test</b>		
1	Adapter Mode	12Vdc (from adapter: 100Vac/ 50Hz)
		12Vdc (from adapter: 100Vac/ 60Hz)
<b>Asymmetric Mode Conducted Emission at Telecommunication Ports test</b>		
1	Adapter Mode (LAN Speed: 100Mbps)	12Vdc (from adapter: 100Vac/ 60Hz)
2	PoE Mode (LAN Speed: 100Mbps)	55Vdc
Note:		
1. The idle mode of conducted emission test at telecom port was pre-tested based on the worst case of link mode. Due to emissions of idle mode being very low compared to link mode, only the link mode data were presented in the test report.		
2. Mode 1 was selected the worst input power from conducted emission test.		
<b>Radiated emission test</b>		
1	Adapter Mode	12Vdc (from adapter: 230Vac/ 50Hz)
2	PoE Mode	55Vdc

### 3.4 Test Program Used and Operation Descriptions

- a. Connected the EUT with Adapter or PoE adapter.
- b. Turned on the power of all equipment.
- c. EUT captured video / audio signal to notebook (kept in a remote area) via an UTP LAN cable, then it displayed messages on its screen simultaneously. **<For Adapter Mode>**
- d. EUT captured video / audio signal to notebook (kept in a remote area) via PoE adapter with an UTP LAN cable, then it displayed messages on its screen simultaneously. **<For PoE Mode>**
- e. EUT save images to Micro SD card.
- f. Steps c-e were repeated.


### 3.5 Primary Clock Frequencies of Internal Source

The highest frequency generated or used within the EUT or on which the EUT operates or tunes is 1.866GHz, provided by VIVOTEK INC., for detailed internal source, please refer to the manufacturer's specifications.


#### 4 Configuration and Connections with EUT

##### 4.1 Connection Diagram of EUT and Peripheral Devices

###### Adapter Mode

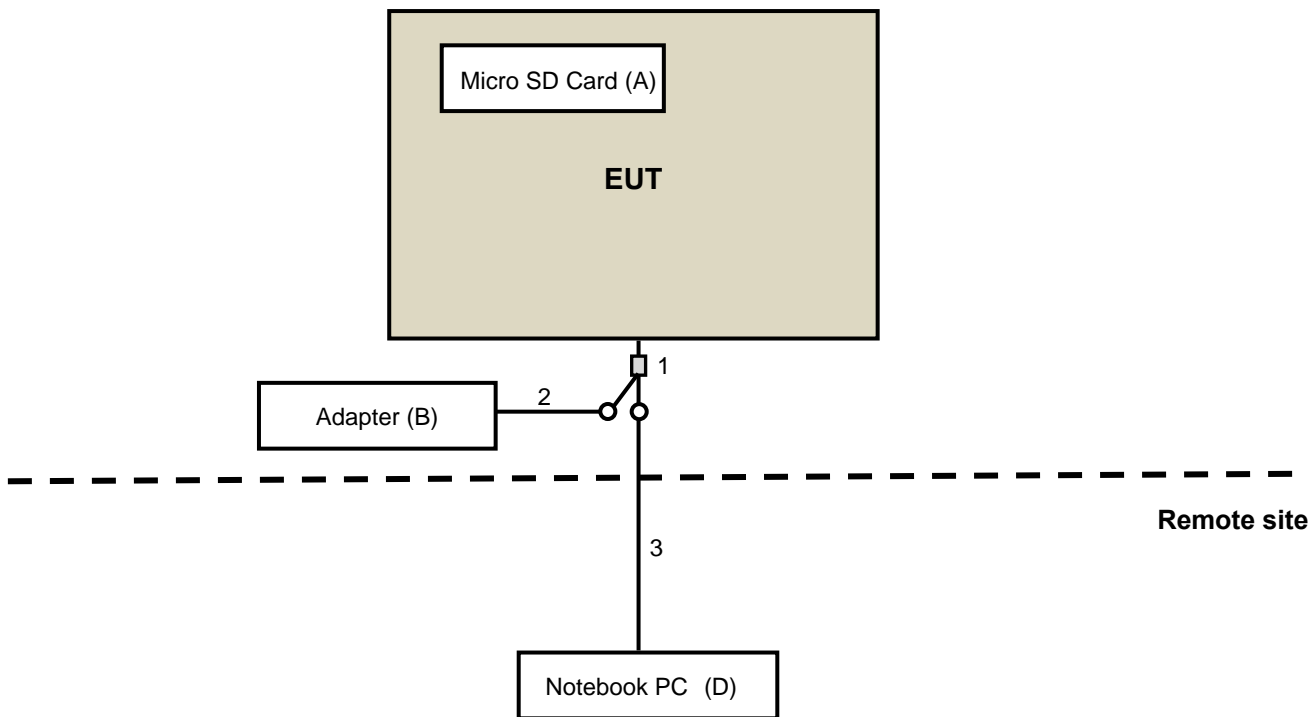

###### PoE Mode

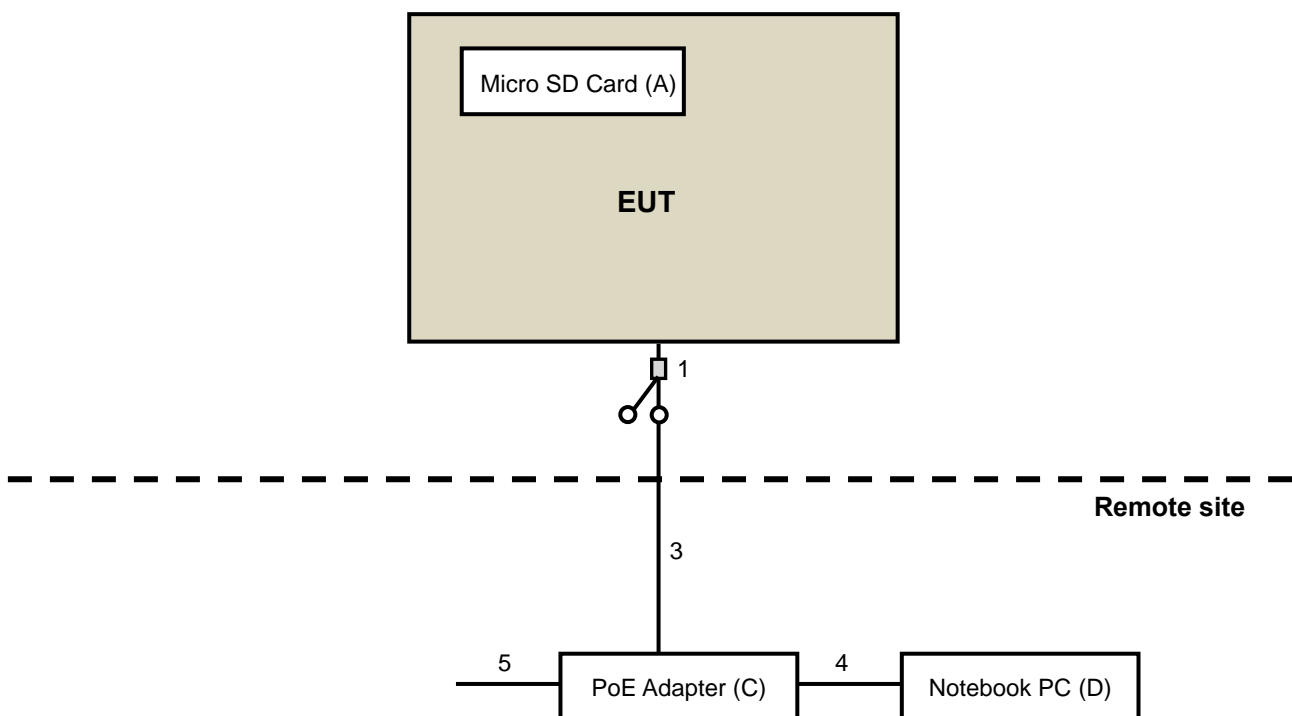

#### 4.2 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Micro SD Card	Transcend	16GB	N/A	N/A	Provided by Lab
B.	Adapter	Atech OEM	ADS018K-X120150	N/A	N/A	Supplied by client
C.	PoE Adapter	Microsemi	PD-9001GR	N/A	N/A	Supplied by client
D.	Notebook PC (For Emission tests)	ASUS	PU401L	ECNXBC0125 28528	FCC DoC Approved	Provided by Lab
	Notebook PC (For Immunity tests)	Lenovo	L440	R90FCKH8	FCC DoC Approved	Provided by Lab

Note:

- All power cords of the above support units are non-shielded (1.8m).
- Items D acted as communication partners to transfer data.
- Rating of item B was listed as below:  
AC I/P: 100-240V, 50-60Hz, 0.5A  
DC O/P: 12V, 1.5A
- Rating of item C was listed as below:  
AC I/P: 100-240V, 50/60Hz, 0.67A  
DC O/P: 55V, 0.6A

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Y cable (LAN + DC)	1	0.3	Y	1	Supplied by client
2.	DC cable	1	1.5	N	0	Supplied by client
3.	LAN cable (Cat.5e)	1	10	N	0	Provided by Lab
4.	LAN cable (Cat.5e)	1	1.0	N	0	Provided by Lab
5.	AC power cord	1	1.8	N	0	Supplied by client

Note: The core(s) is(are) originally attached to the cable(s).

## 5 Conducted Emission from the Mains Power Port

### 5.1 Limits

Frequency range (MHz)	Coupling device	Detector type / bandwidth	Class A limits (dBuV)
0.15 - 0.5	AMN	Quasi-peak / 9kHz	79
0.5 - 30.0			73
0.15 - 0.5		Average / 9kHz	66
0.5 - 30.0			60

Frequency range (MHz)	Coupling device	Detector type / bandwidth	Class B limits (dBuV)
0.15 - 0.5	AMN	Quasi-peak / 9kHz	66 - 56
0.5 - 5			56
5 - 30.0			60
0.15 - 0.5		Average / 9kHz	56 - 46
0.5 - 5			46
5 - 30.0			50

### 5.2 Test Instruments


Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESR3	102413	Feb. 18, 2019	Feb. 17, 2020
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH2-Z5	100104	Dec. 18, 2018	Dec. 17, 2019
LISN With Adapter (for EUT)	AD10	C09Ada-001	Dec. 18, 2018	Dec. 17, 2019
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	847265/023	Nov. 5, 2018	Nov. 4, 2019
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK8129	8129229	May 3, 2018	May 2, 2019
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK 8121	8121-808	Mar. 15, 2019	Mar. 14, 2020
Software	Cond_V7.3.7.4	NA	NA	NA
RF cable (JYEBAO) With 10dB PAD	5D-FB	Cable-C09.01	Feb. 20, 2019	Feb. 19, 2020
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010789	May 8, 2018	May 7, 2019

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in Shielded Room No. 9.  
 3. The VCCI Site Registration No. C-11312.  
 4. Tested Date: Mar. 29, 2019

### 5.3 Test Arrangement

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through an Artificial Mains Network (AMN). Other support units were connected to the power mains through another AMN. The two AMNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The test results of conducted emissions at mains ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

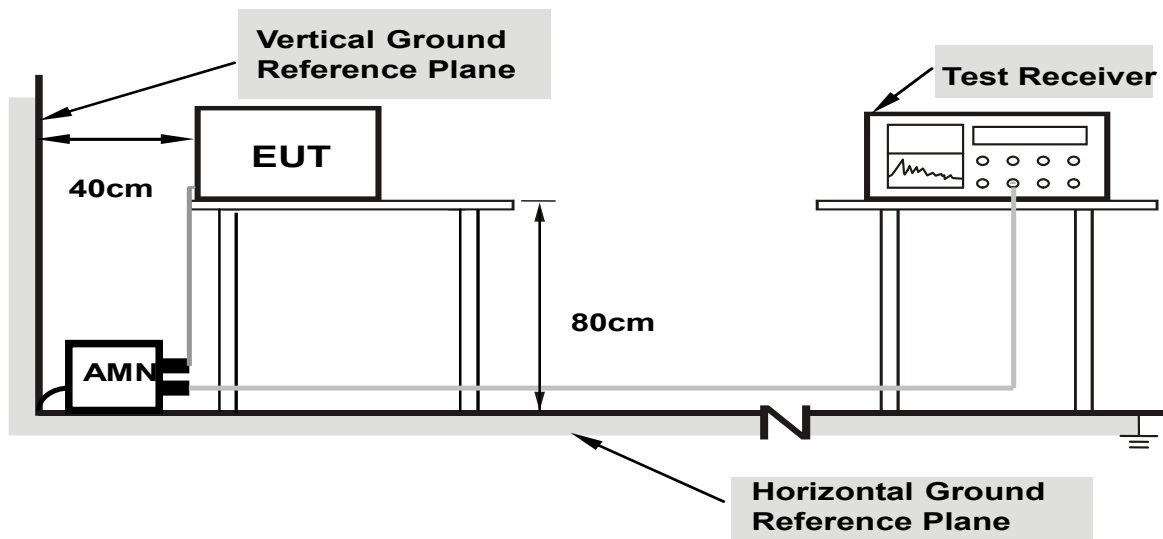

- Note:**
1. Support units were connected to second AMN.
  2. The distance specified between EUT/AE and other metallic objects is  $\geq 0.8$  m in the measurement arrangement for table-top EUT.
  3. Cable on the RGP must to be insulated.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.


#### 5.4 Test Results

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	12Vdc	<b>Environmental Conditions</b>	22°C, 75%RH, 1002mbar
<b>Tested by</b>	Kobe Lu		
<b>Test Mode</b>	Mode 1A		

Phase Of Power : Positive (+)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.16	34.44	15.27	44.60	25.43	66.00	56.00	-21.40	-30.57
2	0.18122	10.18	27.61	9.52	37.79	19.70	64.43	54.43	-26.64	-34.73
3	0.51855	10.25	31.97	24.59	42.22	34.84	56.00	46.00	-13.78	-11.16
4	0.81280	10.27	17.51	9.45	27.78	19.72	56.00	46.00	-28.22	-26.28
5	1.46968	10.37	16.38	7.23	26.75	17.60	56.00	46.00	-29.25	-28.40
6	15.61565	11.15	22.55	17.49	33.70	28.64	60.00	50.00	-26.30	-21.36

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

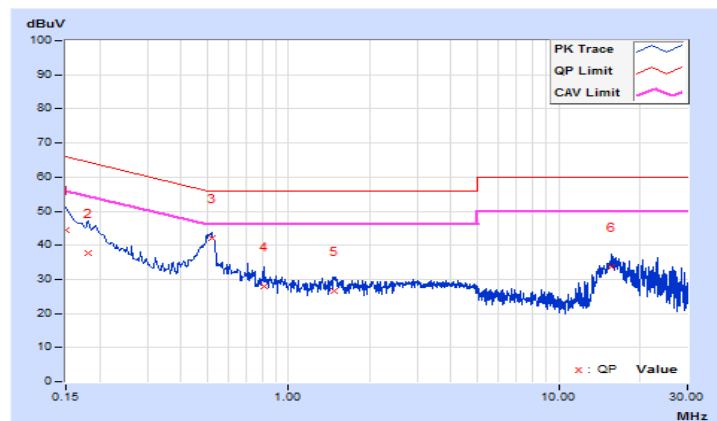


<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	12Vdc	<b>Environmental Conditions</b>	22°C, 75%RH, 1002mbar
<b>Tested by</b>	Kobe Lu		
<b>Test Mode</b>	Mode 1A		

Phase Of Power : Negative (-)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.20	34.26	15.27	44.46	25.47	66.00	56.00	-21.54	-30.53
2	0.18519	10.22	27.81	11.11	38.03	21.33	64.25	54.25	-26.22	-32.92
3	0.51176	10.29	32.17	24.61	42.46	34.90	56.00	46.00	-13.54	-11.10
4	0.72678	10.31	18.56	10.71	28.87	21.02	56.00	46.00	-27.13	-24.98
5	2.66223	10.56	15.69	7.78	26.25	18.34	56.00	46.00	-29.75	-27.66
6	23.12676	11.07	24.77	23.80	35.84	34.87	60.00	50.00	-24.16	-15.13

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

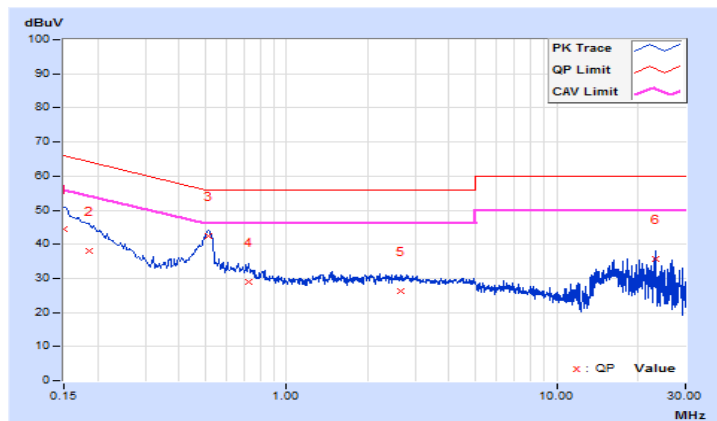


<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	12Vdc	<b>Environmental Conditions</b>	22°C, 75%RH, 1002mbar
<b>Tested by</b>	Kobe Lu		
<b>Test Mode</b>	Mode 1B		

Phase Of Power : Positive (+)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16564	10.17	38.74	15.56	48.91	25.73	65.18	55.18	-16.27	-29.45
2	0.23585	10.20	31.22	9.84	41.42	20.04	62.24	52.24	-20.82	-32.20
3	0.27121	10.21	28.55	10.29	38.76	20.50	61.08	51.08	-22.32	-30.58
4	0.51440	10.25	32.25	24.71	42.50	34.96	56.00	46.00	-13.50	-11.04
5	1.00830	10.29	15.66	8.64	25.95	18.93	56.00	46.00	-30.05	-27.07
6	16.22952	11.18	24.40	20.68	35.58	31.86	60.00	50.00	-24.42	-18.14

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

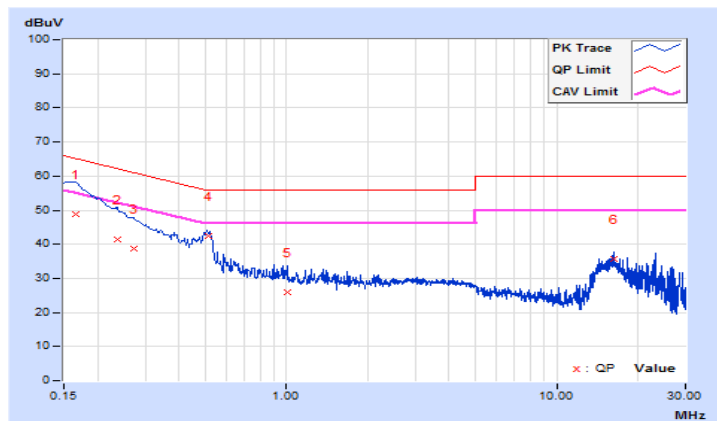


Frequency Range	150kHz ~ 30MHz	Detector Function & Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	12Vdc	Environmental Conditions	22°C, 75%RH, 1002mbar
Tested by	Kobe Lu		
Test Mode	Mode 1B		

Phase Of Power : Negative (-)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.21	39.99	14.22	50.20	24.43	65.79	55.79	-15.59	-31.36
2	0.18508	10.22	36.03	12.85	46.25	23.07	64.25	54.25	-18.00	-31.18
3	0.25125	10.24	29.78	10.84	40.02	21.08	61.72	51.72	-21.70	-30.64
<b>4</b>	<b>0.51664</b>	<b>10.29</b>	<b>32.28</b>	<b>24.99</b>	<b>42.57</b>	<b>35.28</b>	<b>56.00</b>	<b>46.00</b>	<b>-13.43</b>	<b>-10.72</b>
5	1.34847	10.40	17.75	9.26	28.15	19.66	56.00	46.00	-27.85	-26.34
6	16.22952	11.04	22.64	20.34	33.68	31.38	60.00	50.00	-26.32	-18.62

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

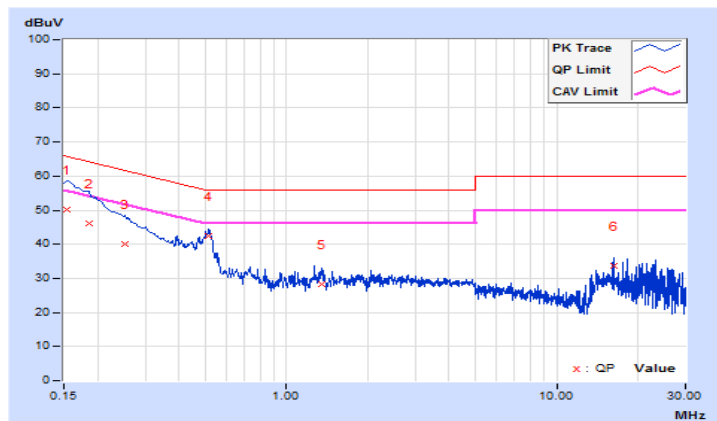

## 6 Asymmetric Mode Conducted Emission at Telecommunication Ports

### 6.1 Limits

For Class A Equipment

Frequency range (MHz)	Coupling device	Detector type / bandwidth	Voltage limits (dBuV)	Current limits (dBuA)
0.15 - 0.5	AAN	Quasi-peak / 9kHz	97 – 87	N/A
0.5 - 30.0			87	
0.15 - 0.5	AAN	Average / 9kHz	84-74	
0.5 - 30.0			74	
0.15 - 0.5	CVP and current probe	Quasi-peak / 9kHz	97 – 87	53 – 43
0.5 - 30.0			87	43
0.15 - 0.5	CVP and current probe	Average / 9kHz	84-74	40 – 30
0.5 - 30.0			74	30
0.15 - 0.5	Current Probe	Quasi-peak / 9kHz	N/A	53 – 43
0.5 - 30.0				43
0.15 - 0.5	Current Probe	Average / 9kHz		40 – 30
0.5 - 30.0				30

For Class B Equipment

Frequency range (MHz)	Coupling device	Detector type / bandwidth	Voltage limits (dBuV)	Current limits (dBuA)
0.15 - 0.5	AAN	Quasi-peak / 9kHz	84 – 74	N/A
0.5 - 30.0			74	
0.15 - 0.5	AAN	Average / 9kHz	74-64	
0.5 - 30.0			64	
0.15 - 0.5	CVP and current probe	Quasi-peak / 9kHz	84 – 74	40 – 30
0.5 - 30.0			74	30
0.15 - 0.5	CVP and current probe	Average / 9kHz	74-64	30 – 20
0.5 - 30.0			64	20
0.15 - 0.5	Current Probe	Quasi-peak / 9kHz	N/A	40 – 30
0.5 - 30.0				30
0.15 - 0.5	Current Probe	Average / 9kHz		30 – 20
0.5 - 30.0				20

## 6.2 Test Instruments

### For Mode 1

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESR3	102413	Feb. 18, 2019	Feb. 17, 2020
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH2-Z5	100104	Dec. 18, 2018	Dec. 17, 2019
LISN With Adapter (for EUT)	AD10	C09Ada-001	Dec. 18, 2018	Dec. 17, 2019
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	847265/023	Nov. 5, 2018	Nov. 4, 2019
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK8129	8129229	May 3, 2018	May 2, 2019
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK 8121	8121-808	Mar. 15, 2019	Mar. 14, 2020
Software	Cond_V7.3.7.4	NA	NA	NA
Software	ISN_V7.3.7.4	NA	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C09.01	Feb. 20, 2019	Feb. 19, 2020
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010789	May 8, 2018	May 7, 2019
FCC ISN	F-071115-1057-1	20651	Feb. 15, 2019	Feb. 14, 2020

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in Shielded Room No. 9.  
 3. The VCCI Site Registration No. T-11587  
 4. Tested Date: Mar. 29, 2019

**For Mode 2**

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESR3	102413	Feb. 8, 2018	Feb. 7, 2019
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH2-Z5	100104	Dec. 18, 2018	Dec. 17, 2019
LISN With Adapter (for EUT)	AD10	C09Ada-001	Dec. 18, 2018	Dec. 17, 2019
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	847265/023	Nov. 5, 2018	Nov. 4, 2019
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK8129	8129229	May 3, 2018	May 2, 2019
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK 8121	8121-808	Mar. 5, 2018	Mar. 4, 2019
Software	Cond_V7.3.7.4	NA	NA	NA
Software	ISN_V7.3.7.4	NA	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C09.01	Feb. 21, 2018	Feb. 20, 2019
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010789	May 8, 2018	May 7, 2019
FCC ISN	F-071115-1057-1	20651	Feb. 12, 2018	Feb. 11, 2019


- Notes:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in Shielded Room No. 9.
  3. The VCCI Site Registration No. T-11587
  4. Tested Date: Jan. 29, 2019.

### 6.3 Test Arrangement

#### Method of Using AANs:

- a. The EUT is placed 0.4 meters from the conducting wall of the shielded room and connected to AAN directly to reference ground plane.
- b. If voltage measurement is used, measure voltage at the measurement port of the AAN, correct the reading by adding the AAN voltage division factor, and compare to the voltage limit.
- c. It is not necessary to apply the voltage and the current limit if a AAN is used.
- d. The test results of disturbance at telecommunication ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

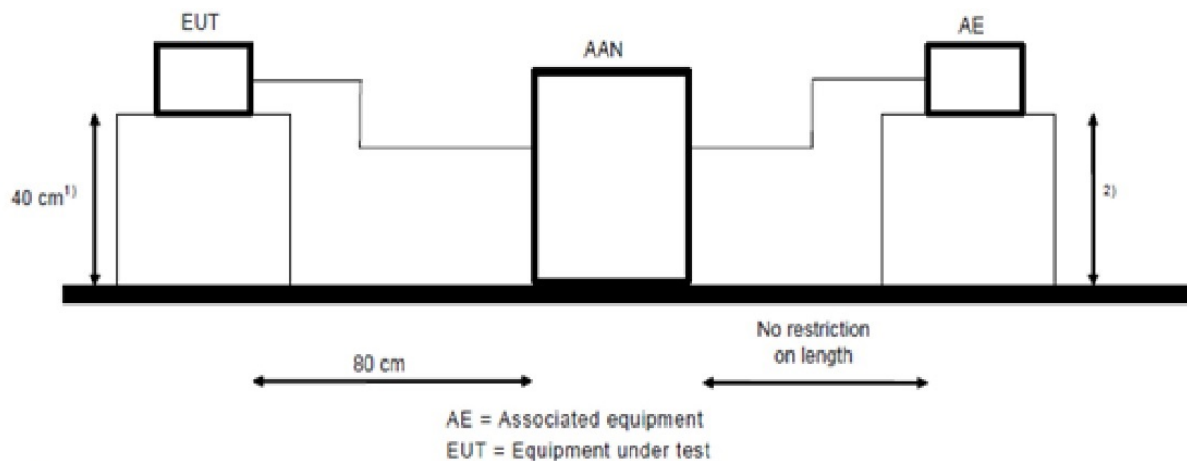

1) Distance to the reference groundplane (vertical or horizontal).

2) Distance to the reference groundplane is not critical.

**Note: Cable on the RGP must to be insulated.**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.


## 6.4 Test Results

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	12Vdc	<b>Environmental Conditions</b>	22°C, 75%RH, 1002mbar
<b>Tested by</b>	Kobe Lu		
<b>Test Mode</b>	Mode 1 RJ45 TELECOM PORT (100Mbps, TFGEN + PING)		

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.51564	9.50	53.25	45.71	62.75	55.21	74.00	64.00	-11.25	-8.79
2	1.21553	9.39	36.14	28.16	45.53	37.55	74.00	64.00	-28.47	-26.45
3	7.92468	9.35	42.15	39.62	51.50	48.97	74.00	64.00	-22.50	-15.03
4	14.27452	9.68	43.04	39.32	52.72	49.00	74.00	64.00	-21.28	-15.00
5	23.12676	10.08	41.04	37.39	51.12	47.47	74.00	64.00	-22.88	-16.53
6	26.61057	10.28	41.00	38.47	51.28	48.75	74.00	64.00	-22.72	-15.25

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

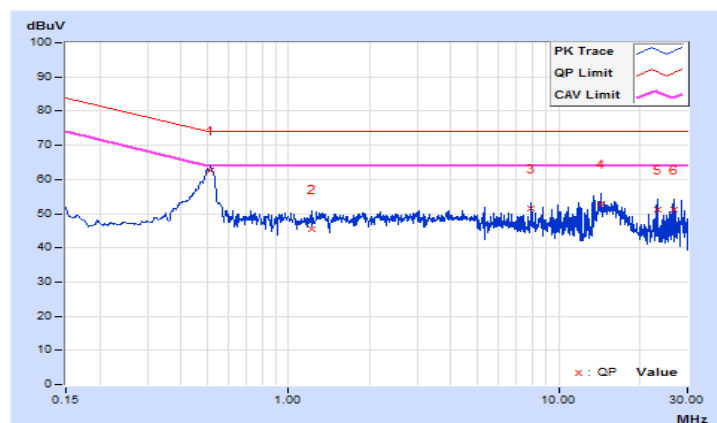


<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	55Vdc	<b>Environmental Conditions</b>	22°C, 66%RH, 1015mbar
<b>Tested by</b>	Justin Liu		
<b>Test Mode</b>	Mode 2 RJ45 TELECOM PORT (100Mbps, TFGEN + PING)		

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.93125	9.41	28.68	26.51	38.09	35.92	74.00	64.00	-35.91	-28.08
2	7.92316	9.38	40.77	40.76	50.15	50.14	74.00	64.00	-23.85	-13.86
3	12.80859	9.57	43.51	43.50	53.08	53.07	74.00	64.00	-20.92	-10.93
4	15.61719	9.69	43.24	43.23	52.93	52.92	74.00	64.00	-21.07	-11.08
<b>5</b>	<b>18.24347</b>	<b>9.81</b>	<b>47.32</b>	<b>47.31</b>	<b>57.13</b>	<b>57.12</b>	<b>74.00</b>	<b>64.00</b>	<b>-16.87</b>	<b>-6.88</b>
6	23.12891	10.08	46.42	46.41	56.50	56.49	74.00	64.00	-17.50	-7.51

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

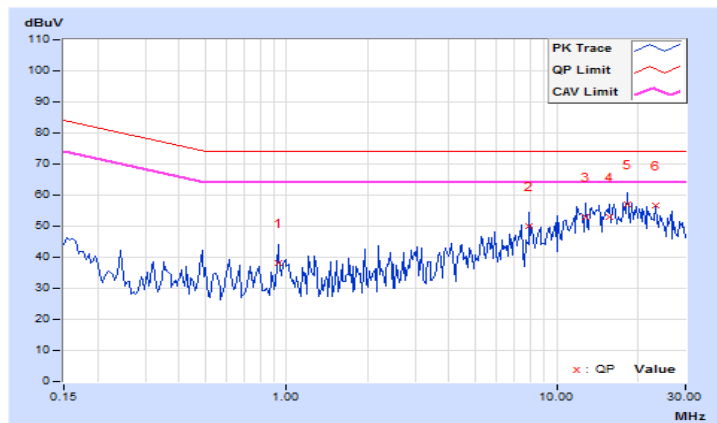

## 7 Radiated Emission at Frequencies up to 1GHz

### 7.1 Limits

For Class A Equipment

Frequency range (MHz)	Distance (m)	Limits (dBuV/m)
30 - 230	10	40
230 - 1000		47
30 - 230	3	50
230 - 1000		57

For Class B Equipment

Frequency range (MHz)	Distance (m)	Limits (dBuV/m)
30 - 230	10	30
230 - 1000		37
30 - 230	3	40
230 - 1000		47

### 7.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESCS 30	100291	Sep. 3, 2018	Sep. 2, 2019
Schwarzbeck Bilog Antenna	VULB9168	9168-303	Nov. 22, 2018	Nov. 21, 2019
Agilent Preamplifier	8447D	2944A08119	Feb. 21, 2018	Feb. 20, 2019
ADT. Turn Table	TT100	0205	NA	NA
ADT. Tower	AT100	0205	NA	NA
Software	Radiated_V7.6.15.9.5	NA	NA	NA
ADT RF Switches BOX	EMH-011	1001	Oct. 25, 2018	Oct. 24, 2019
Pacific RF cable With 5dB PAD	8D	CABLE-ST2-01	Oct. 25, 2018	Oct. 24, 2019

Notes: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in Open Site No. 2.

3. The VCCI Site Registration No. R-237.


4. Tested Date: Jan. 25 to 28, 2019

### 7.3 Test Arrangement

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is up to 1 GHz.

**Note:**

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency up to 1GHz.
- The measurement distance is the shortest horizontal distance between an imaginary circular periphery just encompassing this arrangement and the calibration point of the antenna.

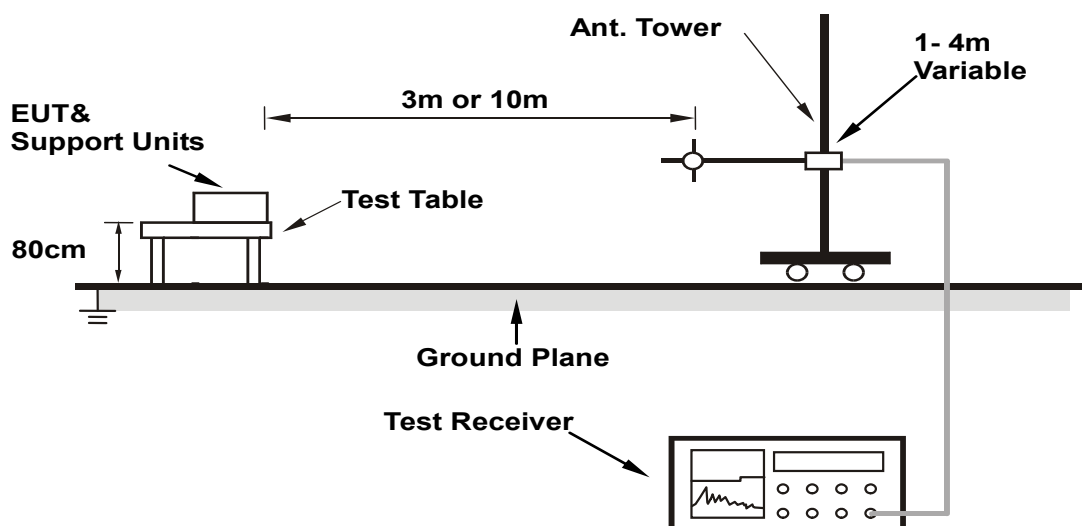

**Note: Cable on the RGP must be insulated.**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 7.4 Test Results


<b>Frequency Range</b>	30MHz ~ 1GHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP), 120kHz
<b>Input Power</b>	12Vdc	<b>Environmental Conditions</b>	21°C, 74%RH, 1014mbar
<b>Tested by</b>	Paul Chen		
<b>Test Mode</b>	Mode 1		

#### Antenna Polarity & Test Distance : Horizontal at 10 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	60.21	22.25 QP	30.00	-7.75	4.00 H	265	31.96	-9.71
2	125.01	21.97 QP	30.00	-8.03	4.00 H	193	32.36	-10.39
3	168.21	23.89 QP	30.00	-6.11	4.00 H	96	33.07	-9.18
4	194.26	21.33 QP	30.00	-8.67	4.00 H	110	32.84	-11.51
5	250.01	29.72 QP	37.00	-7.28	3.62 H	294	39.86	-10.14
6	500.01	29.06 QP	37.00	-7.94	1.92 H	135	32.62	-3.56
7	625.01	29.18 QP	37.00	-7.82	1.37 H	299	29.53	-0.35
8	875.01	30.06 QP	37.00	-6.94	1.00 H	105	27.49	2.57

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

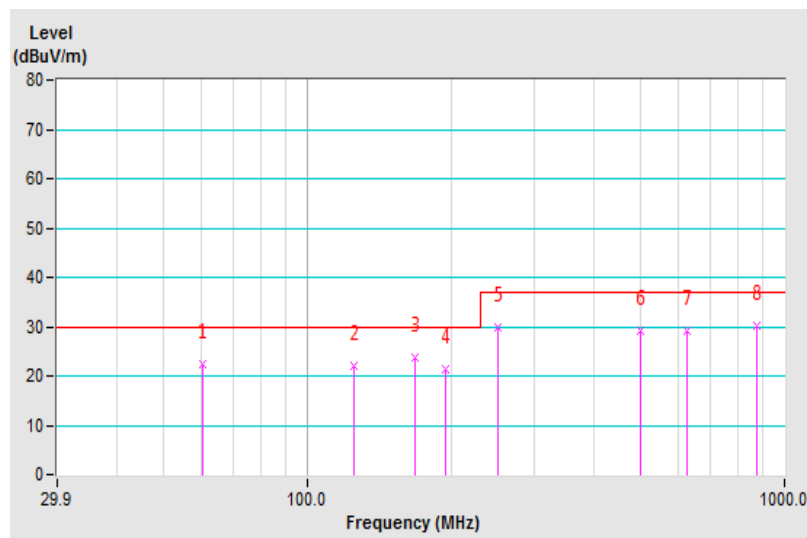


<b>Frequency Range</b>	30MHz ~ 1GHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP), 120kHz
<b>Input Power</b>	12Vdc	<b>Environmental Conditions</b>	21°C, 74%RH, 1014mbar
<b>Tested by</b>	Paul Chen		
<b>Test Mode</b>	Mode 1		

Antenna Polarity & Test Distance : Vertical at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.99	24.63 QP	30.00	-5.37	1.35 V	227	34.00	-9.37
2	104.87	23.85 QP	30.00	-6.15	1.00 V	220	36.30	-12.45
3	125.01	22.13 QP	30.00	-7.87	1.00 V	237	32.52	-10.39
4	132.83	24.13 QP	30.00	-5.87	1.00 V	196	33.70	-9.57
5	168.00	24.05 QP	30.00	-5.95	1.00 V	317	33.22	-9.17
6	250.01	31.92 QP	37.00	-5.08	1.00 V	227	42.06	-10.14
7	500.01	28.06 QP	37.00	-8.94	3.47 V	12	31.62	-3.56
8	625.01	28.09 QP	37.00	-8.91	2.94 V	145	28.44	-0.35
9	875.00	30.07 QP	37.00	-6.93	2.24 V	179	27.49	2.58

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

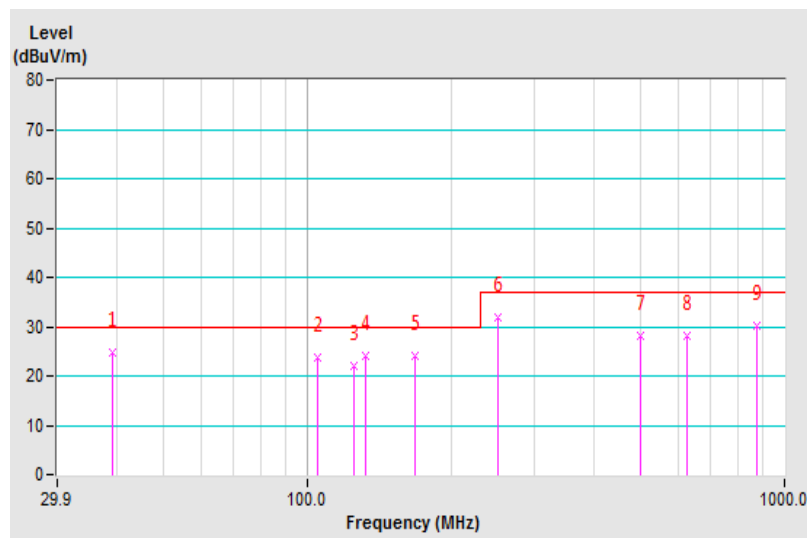


<b>Frequency Range</b>	30MHz ~ 1GHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP), 120kHz
<b>Input Power</b>	55Vdc	<b>Environmental Conditions</b>	21°C, 74%RH, 1013mbar
<b>Tested by</b>	ED Lin		
<b>Test Mode</b>	Mode 2		

Antenna Polarity & Test Distance : Horizontal at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.75	23.68 QP	30.00	-6.32	4.00 H	75	32.45	-8.77
2	133.21	24.86 QP	30.00	-5.14	4.00 H	178	34.40	-9.54
3	171.68	24.21 QP	30.00	-5.79	4.00 H	130	33.61	-9.40
4	215.32	21.52 QP	30.00	-8.48	4.00 H	153	33.07	-11.55
5	250.00	29.11 QP	37.00	-7.89	3.29 H	222	39.25	-10.14
6	371.91	30.85 QP	37.00	-6.15	2.39 H	46	37.61	-6.76
7	432.21	27.96 QP	37.00	-9.04	1.88 H	264	33.09	-5.13
8	858.21	31.12 QP	37.00	-5.88	1.05 H	168	28.77	2.35

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

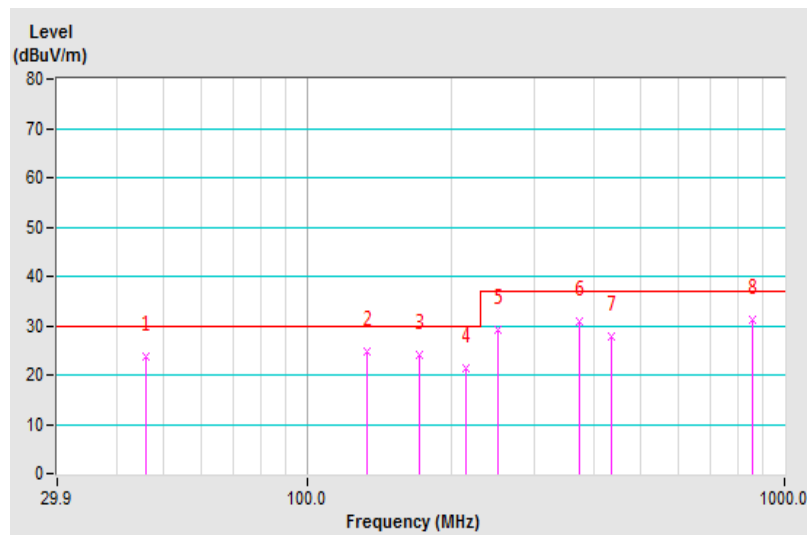


<b>Frequency Range</b>	30MHz ~ 1GHz	<b>Detector Function &amp; Bandwidth</b>	Quasi-Peak (QP), 120kHz
<b>Input Power</b>	55Vdc	<b>Environmental Conditions</b>	21°C, 74%RH, 1013mbar
<b>Tested by</b>	ED Lin		
<b>Test Mode</b>	Mode 2		

Antenna Polarity & Test Distance : Vertical at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.03	26.23 QP	30.00	-3.77	1.00 V	207	35.28	-9.05
2	81.75	23.75 QP	30.00	-6.25	1.75 V	129	37.92	-14.17
3	118.42	25.23 QP	30.00	-4.77	1.00 V	296	36.40	-11.17
4	133.00	26.14 QP	30.00	-3.86	1.00 V	239	35.68	-9.54
5	218.99	24.96 QP	30.00	-5.04	1.00 V	121	36.49	-11.53
6	249.99	28.54 QP	37.00	-8.46	1.00 V	271	38.68	-10.14
7	503.51	30.78 QP	37.00	-6.22	2.79 V	219	34.19	-3.41
8	859.01	30.98 QP	37.00	-6.02	3.19 V	20	28.61	2.37

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

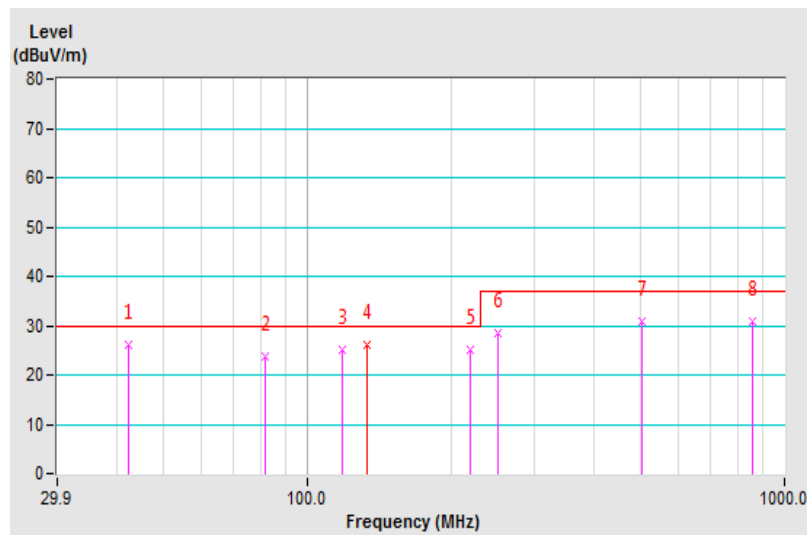

## 8 Radiated Emission at Frequencies above 1GHz

### 8.1 Limits

For Class A Equipment

Frequency range (MHz)	Distance (m)	Detector type	Limits (dBuV/m)
1000 - 3000	3	Average	56
3000 - 6000			60
1000 - 3000		Peak	76
3000 - 6000			80

For Class B Equipment

Frequency range (MHz)	Distance (m)	Detector type	Limits (dBuV/m)
1000 - 3000	3	Average	50
3000 - 6000			54
1000 - 3000		Peak	70
3000 - 6000			74

#### Required highest frequency for radiated measurement

Highest internal frequency ( $F_x$ )	Highest measured frequency
$F_x \leq 108$ MHz	1 GHz
$108$ MHz $< F_x \leq 500$ MHz	2 GHz
$500$ MHz $< F_x \leq 1$ GHz	5 GHz
$F_x > 1$ GHz	$5 \times F_x$ up to a maximum of 6 GHz

NOTE 1 For FM and TV broadcast receivers,  $F_x$  is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.

NOTE 2  $F_x$  is highest fundamental frequency generated or used within the EUT or highest frequency at which it operates.

Where  $F_x$  is unknown, the radiated emission measurements shall be performed up to 6 GHz.

## 8.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Agilent Spectrum	E4446A	MY51100009	Jun. 4, 2018	Jun. 3, 2019
Agilent Test Receiver	N9038A	MY51210129	Feb. 6, 2018	Feb. 5, 2019
Agilent Preamplifier	8449B	3008A01201	Feb. 22, 2018	Feb. 21, 2019
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Feb. 21, 2018	Feb. 20, 2019
EMCI Preamplifier	EMC184045B	980235	Feb. 22, 2018	Feb. 21, 2019
ETS Preamplifier	3117-PA	00215857	Nov. 25, 2018	Nov. 24, 2019
Schwarzbeck Horn Antenna	BBHA-9170	212	Nov. 25, 2018	Nov. 24, 2019
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	Nov. 25, 2018	Nov. 24, 2019
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	Radiated_V8.7.08	NA	NA	NA
SUHNER RF cable With 4dB PAD	SF102	Cable-CH6-01	Aug. 13, 2018	Aug. 12, 2019
SUHNER RF cable With 3/4dB PAD	SF102	Cable-CH8-02 (3.6m)	Aug. 13, 2018	Aug. 12, 2019
MICRO-TRONICS Notch filter	BRC50703-01	010	May 31, 2018	May 30, 2019
MICRO-TRONICS Band Pass Filter	BRM17690	005	May 31, 2018	May 30, 2019


- Notes:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The 3dB beamwidth of the horn antenna is minimum 29 degree (or  $w = 1.55m$  at 3m distance) for 1~6 GHz.
  3. The test was performed in Chamber No. 6.
  4. The Industry Canada Reference No. IC 7450E-6.
  5. The VCCI Site Registration No. G-257.
  6. Tested Date: Jan. 30, 2019

### 8.3 Test Arrangement

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The spectrum analyzer system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

**Note:**

- The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection (PK) at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
- The measurement distance is the shortest horizontal distance between an imaginary circular periphery just encompassing this arrangement and the calibration point of the antenna.

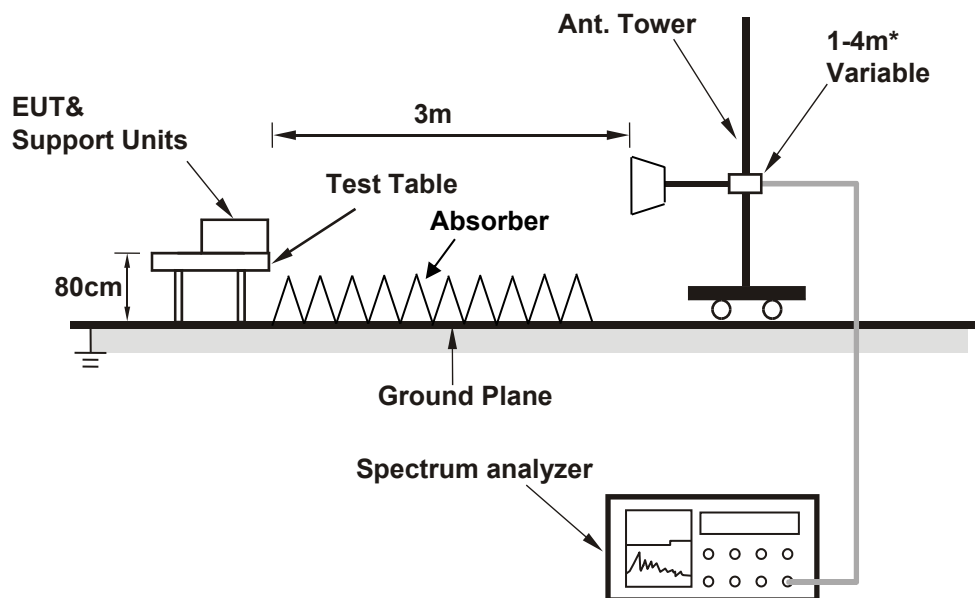

**Note: Cable on the RGP must to be insulated.**

\* :depends on the EUT height and the antenna 3dB beamwidth both.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 8.4 Test Results


<b>Frequency Range</b>	1GHz ~ 6GHz	<b>Detector Function &amp; Bandwidth</b>	Peak (PK) / Average (AV), 1MHz
<b>Input Power</b>	12Vdc	<b>Environmental Conditions</b>	20°C, 71%RH, 1013mbar
<b>Tested by</b>	Vincent Lin		
<b>Test Mode</b>	Mode 1		

#### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1249.94	43.71 PK	70.00	-26.29	1.61 H	84	48.57	-4.86
2	1249.94	31.27 AV	50.00	-18.73	1.61 H	84	36.13	-4.86
3	1374.97	48.37 PK	70.00	-21.63	1.52 H	342	52.16	-3.79
4	1374.97	31.71 AV	50.00	-18.29	1.52 H	342	35.50	-3.79
5	1500.05	47.11 PK	70.00	-22.89	2.47 H	300	51.58	-4.47
6	1500.05	36.30 AV	50.00	-13.70	2.47 H	300	40.77	-4.47
7	1625.06	46.63 PK	70.00	-23.37	2.68 H	146	51.24	-4.61
8	1625.06	31.23 AV	50.00	-18.77	2.68 H	146	35.84	-4.61
9	2200.35	41.71 PK	70.00	-28.29	2.50 H	360	42.01	-0.30
10	2200.35	29.21 AV	50.00	-20.79	2.50 H	360	29.51	-0.30
11	2870.39	42.32 PK	70.00	-27.68	1.50 H	344	41.85	0.47
12	2870.39	29.14 AV	50.00	-20.86	1.50 H	344	28.67	0.47

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

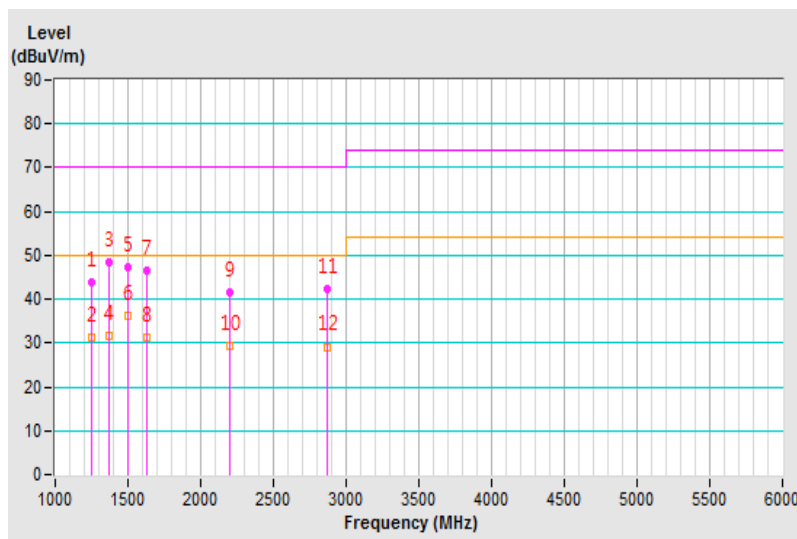


<b>Frequency Range</b>	1GHz ~ 6GHz	<b>Detector Function &amp; Bandwidth</b>	Peak (PK) / Average (AV), 1MHz
<b>Input Power</b>	12Vdc	<b>Environmental Conditions</b>	20°C, 71%RH, 1013mbar
<b>Tested by</b>	Vincent Lin		
<b>Test Mode</b>	Mode 1		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1125.09	45.27 PK	70.00	-24.73	2.70 V	335	50.73	-5.46
2	1125.09	30.38 AV	50.00	-19.62	2.70 V	335	35.84	-5.46
3	1250.03	50.52 PK	70.00	-19.48	1.18 V	211	55.37	-4.85
<b>4</b>	<b>1250.03</b>	<b>39.45 AV</b>	<b>50.00</b>	<b>-10.55</b>	<b>1.18 V</b>	<b>211</b>	<b>44.30</b>	<b>-4.85</b>
5	1375.00	51.10 PK	70.00	-18.90	1.00 V	178	54.89	-3.79
6	1375.00	34.39 AV	50.00	-15.61	1.00 V	178	38.18	-3.79
7	1500.00	49.16 PK	70.00	-20.84	1.51 V	200	53.63	-4.47
8	1500.00	38.78 AV	50.00	-11.22	1.51 V	200	43.25	-4.47
9	1624.94	46.54 PK	70.00	-23.46	2.43 V	40	51.15	-4.61
10	1624.94	31.04 AV	50.00	-18.96	2.43 V	40	35.65	-4.61
11	1876.59	39.80 PK	70.00	-30.20	1.50 V	160	43.39	-3.59
12	1876.59	26.35 AV	50.00	-23.65	1.50 V	160	29.94	-3.59

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

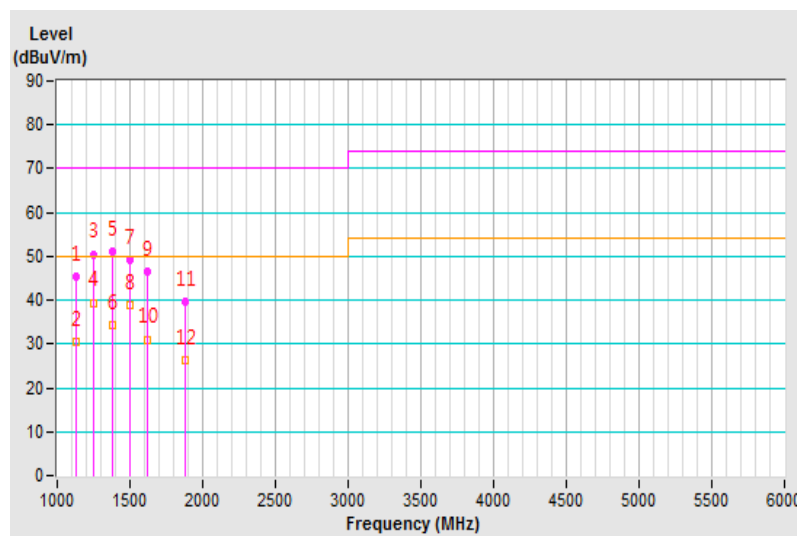


<b>Frequency Range</b>	1GHz ~ 6GHz	<b>Detector Function &amp; Bandwidth</b>	Peak (PK) / Average (AV), 1MHz
<b>Input Power</b>	55Vdc	<b>Environmental Conditions</b>	20°C, 71%RH, 1013mbar
<b>Tested by</b>	Vincent Lin		
<b>Test Mode</b>	Mode 2		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1249.97	45.52 PK	70.00	-24.48	2.26 H	341	50.38	-4.86
2	1249.97	32.95 AV	50.00	-17.05	2.26 H	341	37.81	-4.86
3	1374.94	51.36 PK	70.00	-18.64	1.40 H	125	55.15	-3.79
4	1374.94	34.67 AV	50.00	-15.33	1.40 H	125	38.46	-3.79
5	1500.01	48.16 PK	70.00	-21.84	2.62 H	112	52.63	-4.47
6	1500.01	37.02 AV	50.00	-12.98	2.62 H	112	41.49	-4.47
7	1625.00	49.62 PK	70.00	-20.38	3.43 H	136	54.24	-4.62
8	1625.00	33.60 AV	50.00	-16.40	3.43 H	136	38.22	-4.62
9	1750.14	43.37 PK	70.00	-26.63	1.41 H	92	47.73	-4.36
10	1750.14	30.54 AV	50.00	-19.46	1.41 H	92	34.90	-4.36
11	2003.47	43.44 PK	70.00	-26.56	3.28 H	196	46.78	-3.34
12	2003.47	29.37 AV	50.00	-20.63	3.28 H	196	32.71	-3.34

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

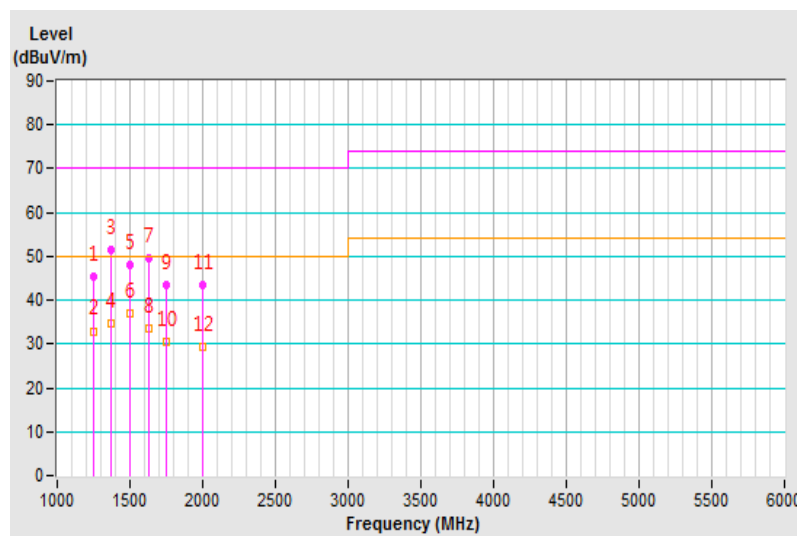


<b>Frequency Range</b>	1GHz ~ 6GHz	<b>Detector Function &amp; Bandwidth</b>	Peak (PK) / Average (AV), 1MHz
<b>Input Power</b>	55Vdc	<b>Environmental Conditions</b>	20°C, 71%RH, 1013mbar
<b>Tested by</b>	Vincent Lin		
<b>Test Mode</b>	Mode 2		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1250.01	50.18 PK	70.00	-19.82	1.10 V	49	55.03	-4.85
2	1250.01	35.77 AV	50.00	-14.23	1.10 V	49	40.62	-4.85
3	1374.97	50.09 PK	70.00	-19.91	2.10 V	0	53.88	-3.79
4	1374.97	32.59 AV	50.00	-17.41	2.10 V	0	36.38	-3.79
5	1500.03	49.28 PK	70.00	-20.72	3.72 V	183	53.75	-4.47
6	1500.03	36.22 AV	50.00	-13.78	3.72 V	183	40.69	-4.47
7	1625.02	49.65 PK	70.00	-20.35	2.50 V	190	54.26	-4.61
8	1625.02	33.43 AV	50.00	-16.57	2.50 V	190	38.04	-4.61
9	2074.14	40.88 PK	70.00	-29.12	1.50 V	102	42.92	-2.04
10	2074.14	27.86 AV	50.00	-22.14	1.50 V	102	29.90	-2.04
11	2624.94	44.59 PK	70.00	-25.41	1.26 V	61	45.16	-0.57
12	2624.94	29.55 AV	50.00	-20.45	1.26 V	61	30.12	-0.57

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

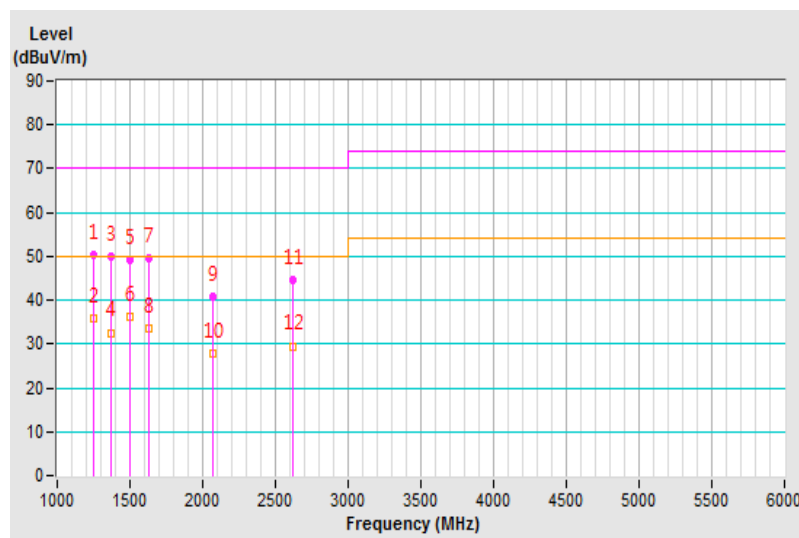

## 9 Pictures of Test Arrangements

### 9.1 Conducted Emission from the Mains Power Port



## 9.2 Asymmetric Mode Conducted Emission at Telecommunication Ports

Mode 1



Mode 2



### 9.3 Radiated Emission at Frequencies up to 1GHz

Mode 1





Mode 2





## 9.4 Radiated Emission at Frequencies above 1GHz

Mode 1

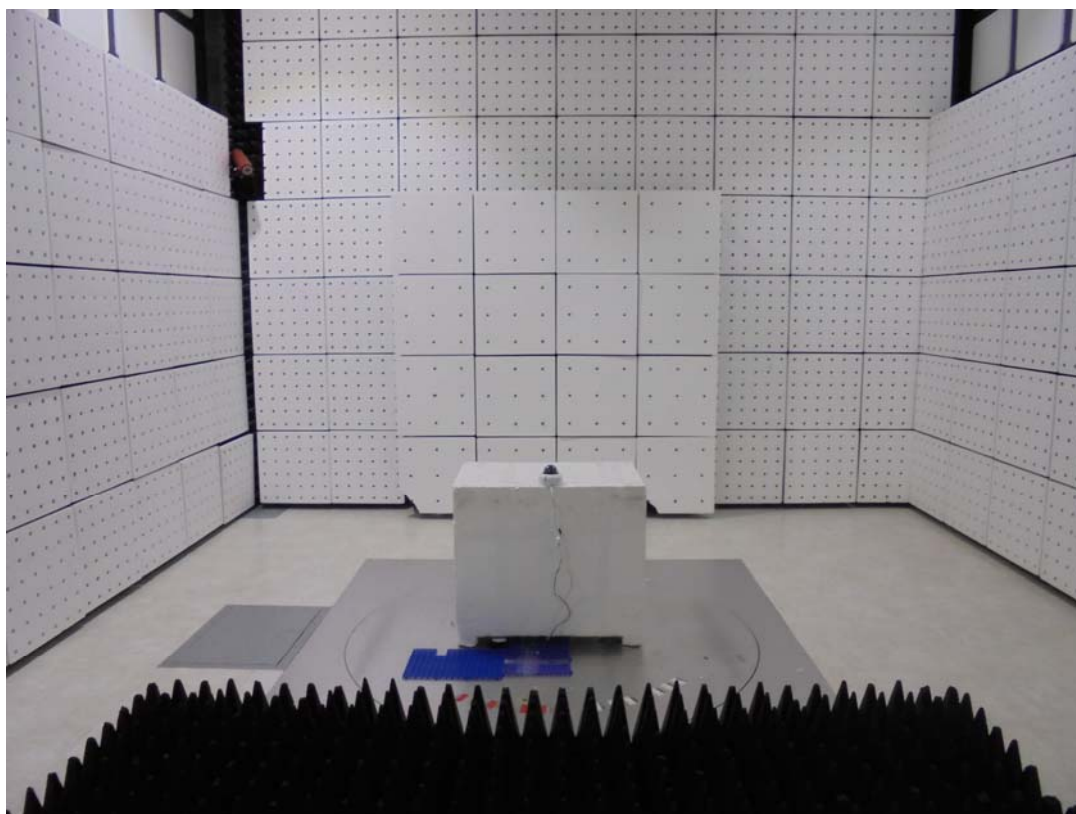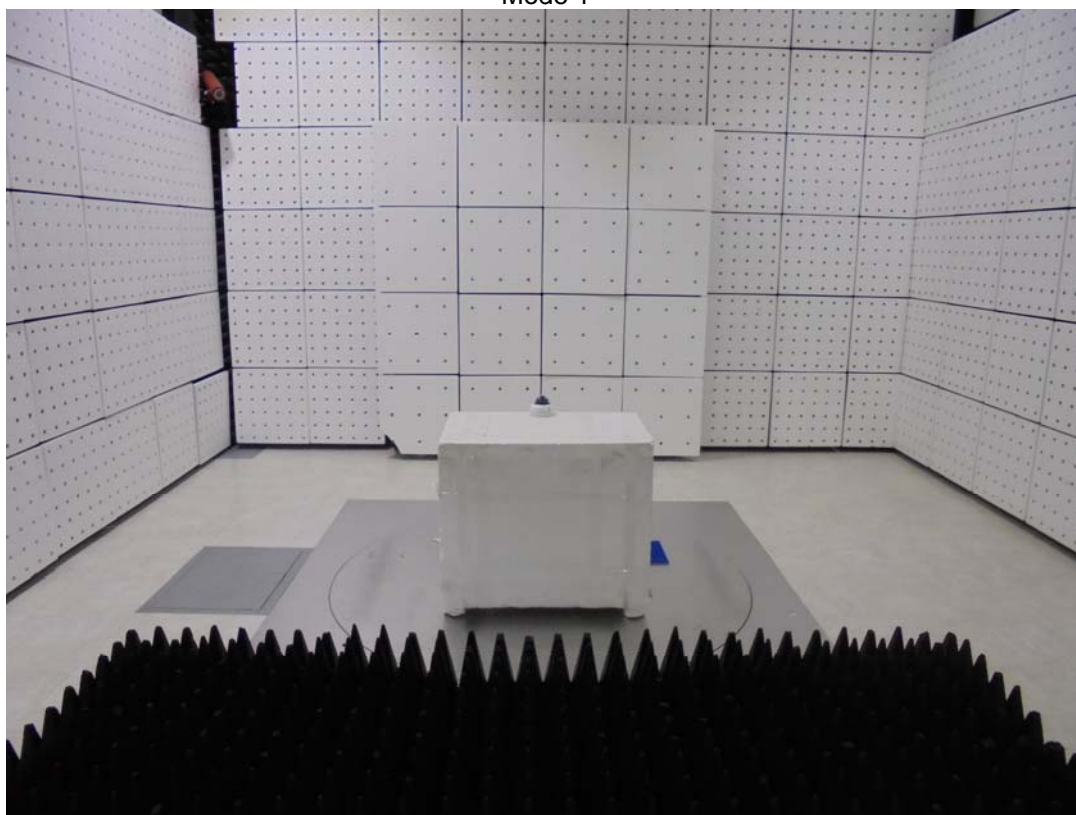

Mode 2

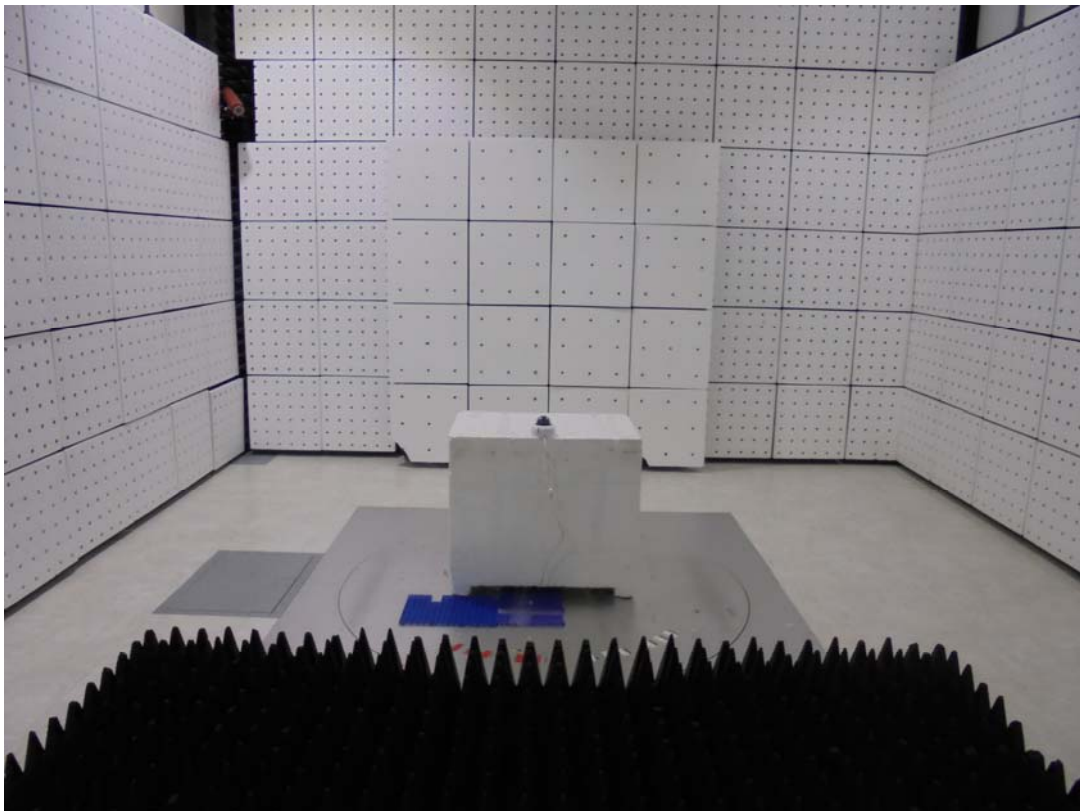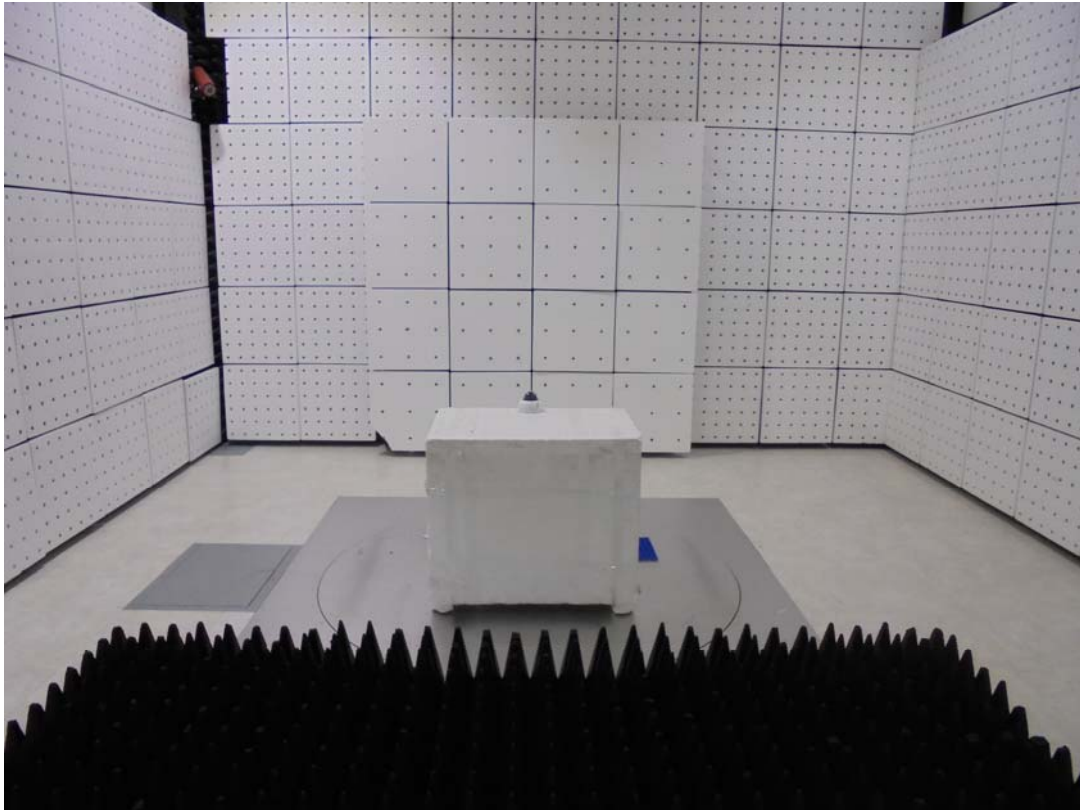

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauVeritas.com](mailto:service.adt@tw.bureauVeritas.com)

**Web Site:** [www.bureauVeritas-adt.com](http://www.bureauVeritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---