



IP9165-LPC Kit (i-CS)

License Plate Capture Solution



Two Lanes • Anti-Glare • 110MPH (180km/hr) • Scene Overview •
Recognition Distance 35M • Remote Back Focus • DIS • CVA Tech

VIVOTEK's IP9165-LPC Kit represents a total solution for LPC (License Plate Capture) applications by leveraging the top tier image quality and traffic monitoring ability of the IP9165-LPC box camera. The IR Illuminator utilizing CVA Tech provides adjustable beam angles for different distances. The Headlight filter is implemented to reduce instances of glare from direct headlight contact. The IP9165-LPC Kit delivers clear license plate images for reliable recognition, in both the sunniest days and in the darkest nights.

Value-added features such as i-CS (intelligent-CS) lens, DIS (Digital Image Stabilization) and remote IR beam angle adjustment ensure that the IP9165-LPC Kit can be easily installed and adjusted to provide the perfect LPR solution. Further, with the high-resolution images supporting a wide range of up to two lanes, the IP9165-LPC Kit is also the most economic solution in LPR applications.

Empowered with VIVOTEK Scene Mode, which provides different exposure levels to avoid overexposure in some lighting conditions, the IP9165-LPC Kit can capture clear plate images from the vehicles moving at speeds of up to 110MPH (180km/hr).


Key Features

- Capture Vehicle Speed up to 110MPH (180km/hr)
- One Camera Covers Both Scene Overview & LPC View
- Supreme Anti-Glare Capability
- One Camera Covers Two Lanes
- i-CS Lens and Remote Controllable IR Illuminator for Clear Images and Easy Installation
- Certified by Numerous LPR Software Manufacturers around the World
- Vandal-Proof IK10-rated and Weather-Proof IP68-rated Housing


Functions

One Camera Covers Both Scene Overview & LPC View

VIVOTEK's 2 Mega-pixel resolution kit provides not only sufficient PPF for license plate capture, but also for a clear overview of moving vehicles, including car color, brand and type for general traffic surveillance purposes. Therefore, with only one VIVOTEK's IP9165-LPC Kit, users can yield more information from one single location.

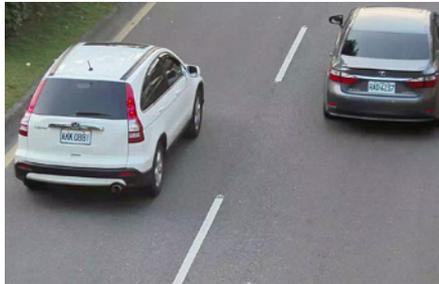



Scene Overview

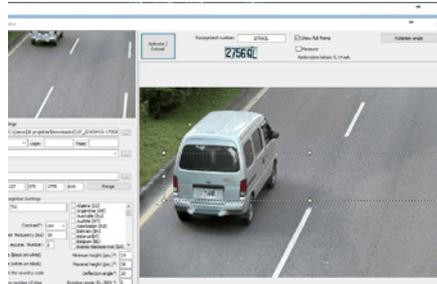

License Plate Recognition View

Supreme Anti-Glare Capability

Capturing images at night is a challenging issue for any surveillance application, but for License Plate Capture applications the challenge is even greater due to noise and glare caused by the headlights of cars. The IP9165-LPC Kit is equipped with external 48W/80W IR Illuminators and a delicate headlight filter, which help to filter out reflected light and only capture detailed information from the plates. Moreover, the IR threshold is also programmed to deploy the IR Illuminator automatically to ensure 24/7 & Day/Night performance.

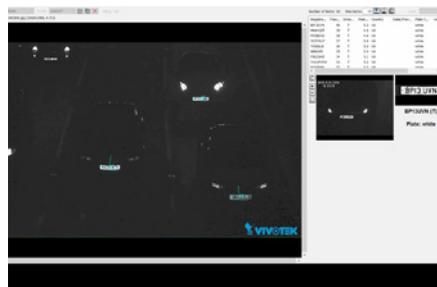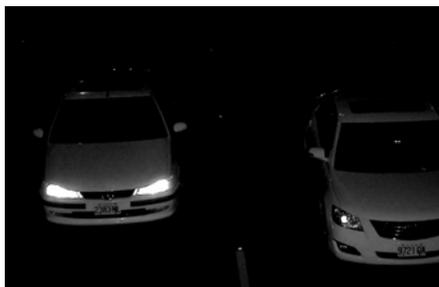

Clear Image Captured with IR Illuminators and Headlight Filter


Remote Control Zoom/Focus and IR Beam Angle

Equipped with the i-CS (intelligent-CS mount) lens and remote controllable IR illuminator, the camera enables installers to remotely adjust zoom/focus and beam angle of IR for easy setup and fine-tuning setting.



Remote Zoom and Beam Angle Settings for Easy Installation

Suggested Installation

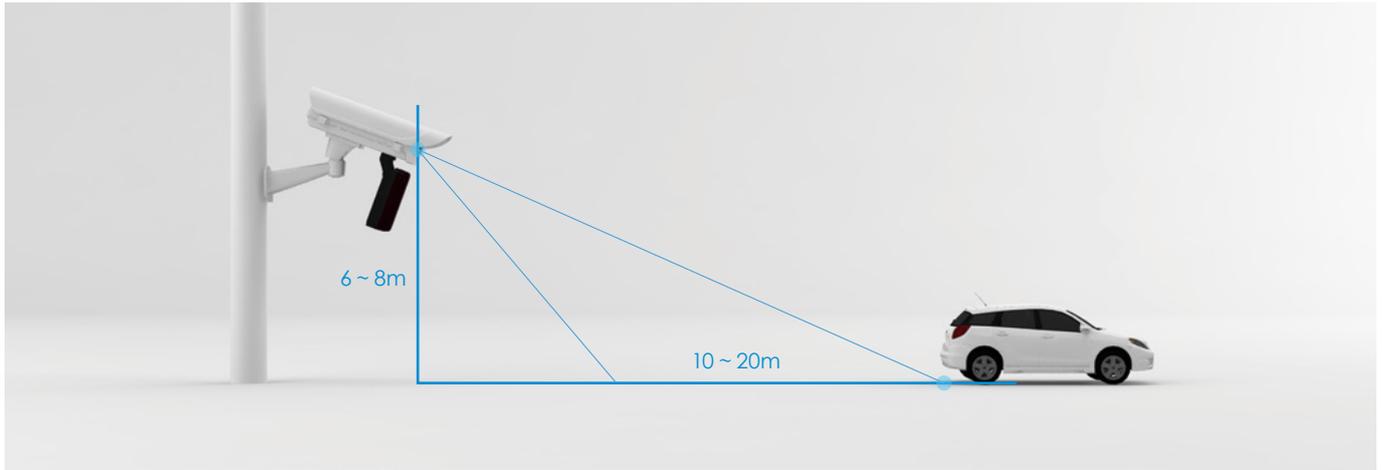

Ordering Information



Kit	IP9165-LPC Kit (Highway, 9-50mm, i-CS)	IP9165-LPC-A Kit (Street, 9-50mm, i-CS)
P/N.	199004700G	199004800G
Category	Model/Description	
IP Camera	 IP9165-LPC(9-50mm) 2MP, 60fps, WDR Pro 140dB, i-CS, 3DNR, DIS	
IR Illuminator	 CA8018-2040 80W IR Illuminator, 850nm, 20° ~ 40° remote control beam angle with CVA Tech	 AI-109 48W embedded IR Illuminator, 850nm 10° ~ 30° remote control beam angle
Enclosure	 AE-23L Outdoor Enclosure with Anti-icing Heated Glass, Fan, 24VAC/ DC in, IP68, IK10, Sunshield	 AE-23A Outdoor Enclosure with Anti-icing Heated Glass, Fan, 24VAC/28VDC in, IP68, IK10, Sunshield, Optional IR Illuminators
Bracket	 AM-21E Cable Management, Wall Mount Bracket	

Technical Specifications

Model	IP9165-LPC Kit (Highway, 9-50mm, i-CS) IP9165-LPC-A Kit (Street, 9-50mm, i-CS)
Max. Speed	Highway: 110MPH (180 km/hr) Street: 60MPH (90 km/hr)
IR Threshold	IR on: 300 Lux IR off: 600 Lux RS485 configurable
Shutter Time	Highway: 1/1,600 to 1/10,000 sec. Street: 1/1,000 to 1/10,000 sec.
Max. Shutter Time	1/5 to 1/32,000 sec.
IR Illuminators	Highway: 80W, 20° ~ 40° remote control beam angle Street: 48W, 10° ~ 30° remote control beam angle, embedded IR illuminator
Capture Range	Up to 35 meters
Captured Lanes	Highway: Road-side: 2 Lanes Gantry: 2 Lanes Street: Road-side: 1 Lane Gantry: 2 Lanes *Suggest width per lane: 3.5~4M
Power Input	AC 24V or DC 24V
Power Consumption	Highway: Max. 110W (AC 24V / DC 24V) Suggested Power: AC 24V or DC 24V/ 5A Street: Max. 78W (AC 24V / DC 24V) Suggested Power: DC 24V or AC 24V / 3.5A
Weight	Highway: 6,482 g Street: 6,200 g
Housing	Weather-proof IP68-rated housing Vandal-proof IK10-rated housing
Operating Temperature	Starting Temperature: 0°C ~ 60°C (32°F ~ 140°F) Working Temperature: -20°C ~ 60°C (-4°F ~ 140°F) -40°C ~ 60°C (-40°F ~ 140°F), with optional cold start heater
Humidity	90%
Video	
Compression	H.265, H.264, MJPEG
Maximum Streams	4 simultaneous streams
Image Settings	Adjustable image size, quality and bit rate; Time stamp, text overlay, flip & mirror; Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, AE speed, privacy masks; Scheduled profile settings, HLC, defog, 3DNR, DIS, video rotation, lens profile
Network	
Users	Live viewing for up to 10 clients

Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/ RTP/RTCP, IGMP, CIFS/SMB, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, TLS, SSL
Interface	10 Base-T/100 Base-TX/1000 Base-T Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard.
ONVIF	Supported, specification available at www.onvif.org
Intelligent Video	
Video Motion Detection	Five-window video motion detection
Alarm and Event	
Alarm Triggers	Motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection, audio detection, MicroSD card life expectancy
Alarm Events	Event notification using digital output, HTTP, SMTP, FTP, NAS server and MicroSD card File upload via HTTP, SMTP, FTP, NAS server and MicroSD card
General	
Smart Focus System	Remote Focus with i-CS lens RBF (Remote Back Focus) reserved
IP Camera Connectors	RJ-45 cable connector for 10/100/1000Mbps Network/PoE connection Audio input *1 Audio output *1 DC 12V power input*1 AC 24V power input *1 Digital input *2 Digital output *2 RS485 *1 BNC *1
Safety Certifications	IP Camera: CE, LVD, FCC Class B, VCCI, C-Tick, UL
Warranty	36 months
System Requirements	
Operating System	Microsoft Windows 8/7
Web Browser	Mozilla Firefox 7~43 (streaming only) Internet Explorer 10/11
Other Players	VLC: 1.1.11 or above QuickTime: 7 or above
Network Camera - Technical Specifications	
Model	IP9165-LPC(9-50mm)
CPU	Multimedia SoC (System-on-Chip)
Flash	128MB
RAM	1GB
Camera Features	
Image Sensor	1/2" Progressive CMOS

Technical Specifications

Maximum Resolution	1920x1080 (2MP)	Color	CA8018-2040: Black AI-109: White
Lens Type	Vari-focal, Remote Back Focus, i-CS	Wavelength	850nm
Focal Length	f = 9 ~ 50 mm	Dimensions	CA8018-2040: 220 x 160 x 73 mm AI-109: 135 x 106 x 111 mm
Aperture	F1.5 ~ F1.6	Included Accessories	CA8018-2040: U-Type Bracket (134 x 34 x 81.5 mm)
Auto-iris	i-CS (P-iris/DC-iris reserved)	Certifications	CA8018-2040: IEC 62471, EN 50130-4, CE: EN61000-6-3, EN60598-1, EN60598-2-5, FCC Class A, EN60529 AI-109: CE, FCC class B, EN62471
Field of View	8.3° ~ 42.8° (Horizontal) 4.7° ~ 24.3° (Vertical) 9.46° ~ 48.9° (Diagonal)	Integrated Control	Built-in photocell for automatic IR on/off
WDR Technology	WDR Pro II		
Day/Night	Removable IR-cut filter for day & night function (Headlight filter design for Anti-Glare)		
Pan/Tilt/Zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built-in)		
On-board Storage	Slot type: MicroSD/SDHC/SDXC card slot (Max. SD card capacity:128GB) Seamless Recording		
Video			
Maximum Frame Rate	60 fps @ 1920x1080		
S/N Ratio	66.2 dB		
Dynamic Range	140 dB		
Audio			
Audio Capability	Two-way Audio (full duplex)		
Compression	G.711, G.726		
Interface	External microphone input External line output		
IR LED - Technical Specifications			
Model	CA8018-2040: IP9165-LPC Kit (Highway), 80W, 20° ~ 40° remote adjustable AI-109: IP9165-LPC-A Kit (Street), 48W, 10° ~ 30° remote adjustable		
Max. Distance	CA8018-2040: 170 ~ 280 meters AI-109: 150 ~ 350 meters		
Beam Angle	CA8018-2040: 20° ~ 40° remote adjustable AI-109: 10° ~ 30° remote adjustable		
Input Power	CA8018-2040: 24VDC ±10%, 24VAC(50/60Hz) ±10% AI-109: 24VAC/28VDC with AE-23A enclosure		
Power Consumption	CA8018-2040: 80W AI-109: 48W		
Weight	CA8018-2040: 2.1 kg AI-109: 450 g		
Housing	Weather-proof IP68-rated housing Vandal-proof IK10-rated housing		
Operating Temperature	CA8018-2040: -40°C ~ 60°C (-40°F ~ 140°F) AI-109: -40°C ~ 50°C (-40°F ~ 122°F)		

Compatible Accessories

Lens



AL-239
8 ~ 80 mm, F1.6, DC-iris



AL-24A
12 ~ 40 mm, F1.8, P-iris



AL-24B
3.6 ~ 17 mm, F1.5, P-iris



AL-251
3.9 ~ 10 mm, F1.5, i-CS



AL-252
9 ~ 50 mm, F1.5, i-CS
(Standard Package)

Brackets



AM-314
Pole Mount Bracket



AM-315
Pole Mount Bracket

Power



HLG-120H-24
120W Single Output
Switching Power Supply,
DC24V



AA-351
Outdoor Power Box, IP67,
IK10



AA-352
Outdoor Power Box, IP67,
IK10