



# NS9521

## **CMS Station**







Trend Micro **IoT Security** 

Smart VCA

Versatile and Powerful In One Equipment

**VAST 2-inside CMS Station** Expandable up to 64 channels

Great video decoding capability supporting **VIVOTEK MA/MS** Cameras series


**Built-in free Data Magnet** license for 3rd party device integration

**Cybersecurity** solution management **Smart video content** analysis integration

**VIVOTEK LPR** solutions integration

In addition to the aforementioned benefits. NS9521 also functions as a Network Video Recorder, a Display Station and a Central Management System (CMS).

### **Central Management System** (CMS)

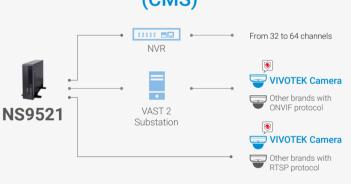

- Data Magnet
- Functions as a central management system (CMS) for multiple VIVOTEK substations as NVR and VAST2 substation
- Up to 400 Mbps of bandwidth
- Able to view live video or recorded video when: Used as a display station for additional cameras and recorders
- Individual video display output x2
- Three built-in monitor outputs, the other one is colon
- Video recording throughput, up to 400 Mbps of bandwidth
- · Multiple on-screen display modes

Equal: 1x1, 2x2, 3x3, 4x4, 5x5, 6x6, 7x7, 8x8

Panorama: 1P+6, 2P, 2P+3, 3P

Enfocados: 1+12, 1+16, 1+3, 1+5, 1+7, 1+9, 2+8 Vertical: 1V+6, 2V+2, 2V+3, 3V, 3V+4, 4V, 4V+4, 5V

## **Display Station VIVOTEK Cameras** Other brands with ONVIF protocol NS9521 Other brands with RTSP protocol

#### Network Video Recorder



- Built-in VIVOTEK CMS: VAST 2
- Smart VCA event: Al-based video analysis event supported
- VIVOTEK LPR Solutions integration
- Support Fisheye cameras with multiple dewarping modes

All specifications are subject to change without notice. © VIVOTEK INC. All rights reserved. Ver. 1