

# IB9367-EHT-v2

## Bullet Network Camera

2MP 60fps • H.265 • SNV • WDR Pro • 50/100M IR • IP66 • IP67 • IK10

### Technical Specifications

#### System Information

Model	IB9367-EHT-v2 (2.7-13.5mm) IB9367-EHT-v2 (5-50mm)
CPU	Multimedia SoC (System-on-Chip)
Flash	8 GB
RAM	1 GB

#### Camera Features

Image Sensor	1/2.8" Progressive CMOS
Max. Resolution	1920x1080 (2MP)
Lens Type	Motorized, Vari-focal, Remote Focus
Focal Length	IB9367-EHT-v2 (2.7-13.5mm): f = 2.7 ~ 13.5 mm IB9367-EHT-v2 (5-50mm): f = 5 ~ 50 mm
Aperture	IB9367-EHT-v2 (2.7-13.5mm): F1.4 ~ F2.8 IB9367-EHT-v2 (5-50mm): F2.0
Iris Type	IB9367-EHT-v2 (2.7-13.5mm): P-iris IB9367-EHT-v2 (5-50mm): DC-iris
Field of View	IB9367-EHT-v2 (2.7-13.5mm): 105° ~ 33° (Horizontal) 55° ~ 18° (Vertical) 126° ~ 37° (Diagonal) IB9367-EHT-v2 (5-50mm): 47° ~ 8° (Horizontal) 26° ~ 5° (Vertical) 55° ~ 9° (Diagonal)
Shutter Time	1/5 sec. to 1/32,000 sec.
WDR Technology	WDR Pro
Day/Night	Yes
Removable IR-cut Filter	Yes



IR Illuminators	IB9367-EHT-v2 (2.7-13.5mm): Built-in IR illuminators, effective up to 50 meters with Smart IR II, IR LED*4 IB9367-EHT-v2 (5-50mm): Built-in IR illuminators, effective up to 100 meters with Smart IR II, IR LED*4
Minimum Illumination	IB9367-EHT-v2 (2.7-13.5mm): 0.035 lux @ F1.4 (Color) <0.005 lux @ F1.4 (B/W) 0 lux with IR illumination on IB9367-EHT-v2 (5-50mm): 0.040 lux @ F2.0 (Color) <0.005 lux @ F2.0 (B/W) 0 lux with IR illumination on
Pan Range	±180°
Tilt Range	90°
Rotation Range	±180°
Pan/Tilt/Zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built-in)
Storage	Seamless Recording to MicroSD/SDHC/SDXC card slot and recording to network-attached storage (NAS)
Built-in Installation Aids	Remote focus, remote zoom, Micro USB* *Requires Wi-Fi dongle and Micro B converter
<b>Video</b>	
Video Compression	H.265, H.264, MJPEG
Maximum Frame Rate	60 fps @ 1920x1080
Maximum Streams	3 video streams (Up to 8 configurable profiles)
S/N Ratio	IB9367-EHT-v2 (2.7-13.5mm): 53 dB IB9367-EHT-v2 (5-50mm): 49 dB
Dynamic Range	120 dB
Video Streaming	Adjustable resolution, quality and bit rate control, Smart Stream III
Image Settings	General settings: video title and time stamp overlay, video orientation (flip, mirror, rotation), day/night settings; Illuminators: illuminators, anti-overexposure; Image settings: white balance, image adjustment (brightness, contrast, saturation, sharpness, gamma curve), defog, 3DNR, EIS, scene mode (auto, deblur); Exposure: BLC, HLC, exposure control (exposure level, iris adjustment, exposure time, gain control, iris mode), AE speed adjustment, WDR; Focus: zoom, focus; Privacy mask; Scheduled profile settings
<b>Audio</b>	
Audio Capability	Two-way audio (Full duplex)
Audio Compression	G.711, G.726, MPEG-2 AAC-LC
Audio Interface	External microphone input External line output
<b>Network</b>	
Users	Live viewing for up to 10 clients
Security	Access list, Account block, Audit log, Configurable password strength protection, CSRF protection, Digest authentication, HTTPS, IEEE 802.1x, Secure boot, Session timeout, Signed firmware, Trend Micro IoT Security (Brute force attack event, Cyberattack event, Quarantine event), User access log, User account management
Protocols	802.1X, ARP, Bonjour, CIFS/SMB, DDNS, DHCP, DNS, FTP/SFTP, HTTP/HTTPS, ICMP, IGMPv3, IPv4, IPv6, NTP, PPPoE, QoS (CoS/DSCP), RTSP/RTP/RTCP, SMTP, SNMP, SSL, TCP/IP, TLS 1.2, UDP, UPnP
Interface	10 Base-T/100 Base-TX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard.
ONVIF	Profile G, S, T supported, specification available at <a href="http://www.onvif.org">www.onvif.org</a>
<b>AI Analytics</b>	
Compute Capability	SoC with built-in hardware deep learning accelerator
Vision Object Analytics	Object Detection: people, vehicle (4-wheeled); Path Extraction
Application	Deep Learning VCA (Smart Motion Detection, Smart VCA) Smart Motion Detection (Five-window video motion detection, People detection, Vehicle detection, Time filter), Smart VCA (Intrusion detection, Loitering detection, Line crossing detection, Unattended object detection, Missing object detection, Face detection, Crowd detection)
Application available with license	Running detection, Parking Violation Detection, Restricted Zone Detection Support for more analytic applications and free trial, please visit <a href="https://vivotek.com/video-analytics">https://vivotek.com/video-analytics</a>



## Solution Integration

Applications Stratocast, Trend Micro IoT Security (3-year free trial)

## Alarm and Event

Event Trigger Audio detection, camera tampering detection, cybersecurity events (brute force attack event, cyberattack event, quarantine event), digital input, manual trigger, motion detection, periodical trigger, recording notification, SD card life expectancy, shock detection, system boot

Event Action Event notification via audio clip, camera link, digital output, email, HTTP, FTP/SFTP, NAS server, SD card  
File upload via email, HTTP, FTP/SFTP, NAS server, SD card

## General

Connectors Default I/O  
RJ-45 cable connector for 10/100 Mbps PoE network connection  
Audio line input  
Audio line output  
DC 12V power input  
Digital input  
Digital output (DO+: 12V, 50mA; DO-: 30V, Open Drain, 1A)  
Micro USB

Module I/O\*  
Digital input\*2  
Digital output\*2 (DO+: 12V, 50mA; DO-: 30V, Open Drain, 1A)  
AC 24V power input  
\*Requires extension I/O module kit

LED Indicator System power and status indicator

Power Input AC 24V\*, DC 12V, IEEE 802.3af PoE Class 0 (Power Redundancy)  
\*Requires extension I/O module kit

Power Consumption PoE: Max. 10.77/7.77 W (IR on/off)  
DC 12V: Max. 9.24/6.24 W (IR on/off)  
AC 24V\*: Max. 10.3/7.3 W (IR on/off)  
\*Requires extension I/O module kit

Dimensions ø 145.9 x 288 mm

Weight IB9367-EHT-v 2 (2.7-13.5mm): 1.97 kg  
IB9367-EHT-v 2 (5-50mm): 2 kg

Certifications EMC: CE (EN 55032 Class A, EN 55035, EN 50121-4), FCC (FCC Part 15 Subpart B Class A), RCM (AS/NZS CISPR 32 Class A), VCCI (VCCI-CISPR 32 Class A); Safety : UL (UL 62368-1), CB (IEC/EN 62368-1, IEC/EN 60950-22, IEC/EN 62471); Environment: IK10 (IEC 62262), IP66/67 (IEC 60529); NEMA (NEMA 250 Type 4X), IEC 60068-2-11; IA: BIS (IS 13252), BSMI (EMC: CNS 13438, Safety: CNS 14336-1)

Operating Temperature Starting Temperature:  
-30°C ~ 50°C (-22°F ~ 122°F)  
Working Temperature:  
-40°C ~ 60°C (-40°F ~ 140°F) (IR off)  
-40°C ~ 50°C (-40°F ~ 122°F) (IR on)

Humidity 98% RH (non-condensing)

## System Requirements

Operating System Microsoft Windows 10/8/7  
Mac 10.12 (Chrome only)

Web Browser Chrome 58.0 or above  
Internet Explorer 10/11

Other Players VLC: 1.1.11 or above

## Included Accessories


Packing Contents Quick installation guide, product labels, alignment sticker, L-shaped wrench, screw pack, waterproof accessory pack, sunshield, I/O cable

Optional Accessories Please refer to Accessory Selection Guide

## DORI (EN 62676-4 Standard)

Detect (25PPM/ 8PPF) IB9367-EHT-v2 (2.7-13.5mm): Wide 48.0 m (157.48 ft); Tele 135.6 m (444.88 ft)  
IB9367-EHT-v2 (5-50mm): Wide 93.2 m (302.82 ft); Tele 585.0 m (1,919.29 ft)

Observe (63PPM/ 19PPF) IB9367-EHT-v2 (2.7-13.5mm): Wide 19.1 m (62.66 ft); Tele 53.8 m (176.51 ft)  
IB9367-EHT-v2 (5-50mm): Wide 37.0 m (121.39 ft); Tele 232.1 m (761.48 ft)

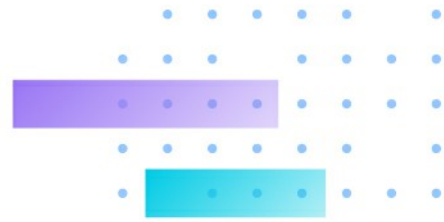

---

Recognize (125PPM/ 38PPF)	IB9367-EHT-v2 (2.7-13.5mm): Wide 9.6 m (31.50 ft); Tele 27.1 m (88.91 ft) IB9367-EHT-v2 (5-50mm): Wide 18.6 m (61.02 ft); Tele 117.0 m (383.86 ft)
Identify (250PPM/ 76PPF)	IB9367-EHT-v2 (2.7-13.5mm): Wide 4.8 m (15.75 ft); Tele 13.6 m (44.62 ft) IB9367-EHT-v2 (5-50mm): Wide 9.3 m (30.51 ft); Tele 58.5 m (191.93 ft)

---